


## AC1154

Addressing unit AS-i 3.0

AS-Interface bus system

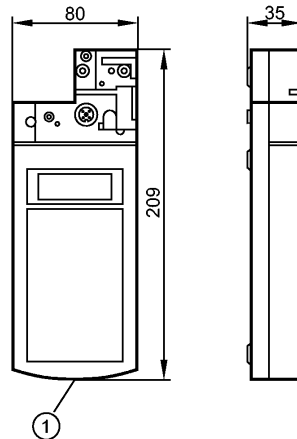

1: charging socket



### Product characteristics

AS-i addressing unit

AS-i version 3.0 with extended addressing mode

### Application

Application	Set-up and diagnosis
Function	<ul style="list-style-type: none"> <li>- Addressing or programming of max. 62 slaves</li> <li>- Display of all the slaves on the bus</li> <li>- Reading and writing slave data and slave parameters</li> <li>- Reading of safety codes (AS-i Safety at Work)</li> <li>- Selection and display of the different operating modes via the MODE key</li> <li>- Indication of the peripheral fault flag</li> </ul> <p>- Addressing of slaves with an optical data interface by means of a special IR adapter</p> <p>The following components can be directly connected by means of a cable:</p> <ul style="list-style-type: none"> <li>- Active module upper parts</li> <li>- Intelligent sensors and actuators</li> <li>- Intelligent AS-i slaves</li> </ul>

### Electrical data

Supply	<ul style="list-style-type: none"> <li>- built-in accumulator</li> <li>- charging time approx. 12 hours</li> <li>- operating time with accumulator full: 8 hours, this corresponds to approx. 250 writing/reading operations</li> <li>- 230 V AC charging unit supplied or equivalent unit dependent on country voltage requirements</li> <li>- protection rating IP 20</li> </ul>
Short circuit proof	yes
AS-i interface reverse polarity protection	yes

### Mechanical data

Weight	[kg]	0.568
--------	------	-------

### Accessories

Accessories (optional)	<ul style="list-style-type: none"> <li>- addressing adapter for compact modules order no. E70423;</li> <li>- addressing cable order no. E70213;</li> <li>- IR addressing adapter order no. E70211</li> </ul>
------------------------	--

### Remarks

Pack quantity	[piece]	1
---------------	---------	---