


**IFT205**

IFKC004BASKG/M/V4A/US-104-DRS

**Inductive sensors**

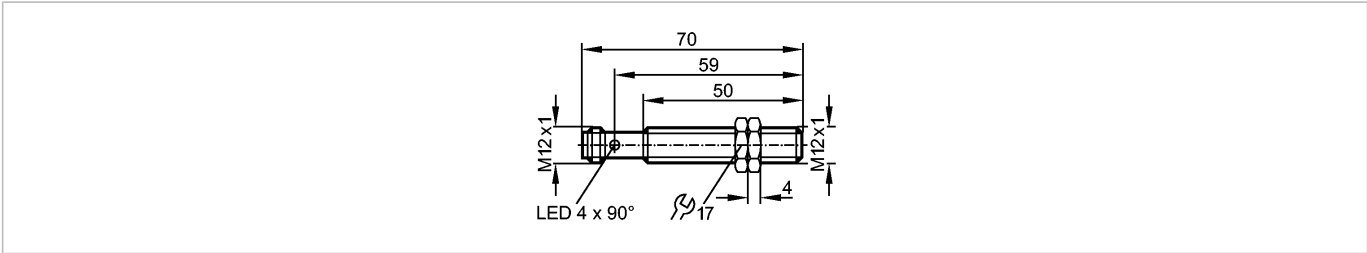

**Product characteristics**

Inductive sensor
Metal thread M12 x 1
Quick disconnect
Operation as 3-wire or 2-wire possible
Increased sensing range
Optical setting aid (2 LED)
gold-plated contacts
Sensing range 4 mm; [f] flush mountable

**Electrical data**

Electrical design	3-wire DC PNP; 2-wire DC PNP/NPN
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 10
Protection class	II
Reverse polarity protection	yes

**Outputs**

Output function	normally open
Voltage drop [V]	< 2.5
Minimum load current [mA]	2; only in 2-wire operation
Leakage current [mA]	< 0.5; only in 2-wire operation
Current rating [mA]	100
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	500

**Monitoring range**

Sensing range [mm]	4
Operating distance [mm]	0...3.24

**Accuracy / deviations**

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / aluminium approx. 0.4 / copper approx. 0.3
Hysteresis [% of Sr]	1...20

**Environment**

Ambient temperature [°C]	0...100
Protection	IP 68 / IP 69K

**Tests / approvals**

EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated: 10 V/m
	EN 61000-4-4 Burst: 2 kV
	EN 61000-4-6 HF conducted: 10 V

## IFT205

IFKC004BASKG/M/V4A/US-104-DRS

Inductive sensors

	EN 55011:	class B
MTTF	[Years]	1500

### Mechanical data

Mounting	flush mountable
Housing materials	stainless steel (316L); active face: PEEK (polyether ether ketone)
Weight	[kg] 0.031



### Displays / operating elements

Output status indication	LED	yellow (4 x 90°)
Setting aid	LED	red

### Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

### Wiring



### Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

### Remarks

Remarks	suitable for PLC type 1 according to IEC 61131-2
---------	--

Pack quantity	[piece] 1
---------------	-----------