


**DI5012**

DIA3010-ZPKG/5M

Evaluation systems, power supplies

Article discontinued as of 31.March 2017

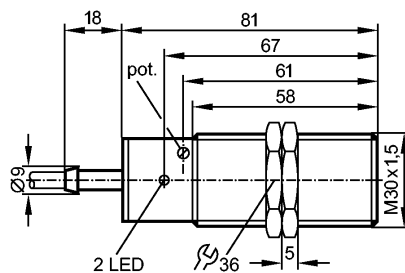

**Product characteristics**

Compact speed monitor M30

DIA

M30 x 1.5

Cable

Inductive sensor

Sensing range 10 mm [f]

flush mountable

**Application**

Application	simple evaluation of rotating and linear movement with regard to underspeed; blocking
Switching function	output is switched during the start-up delay and if (f actual) is greater than (f preset)
Electrical design	DC PNP
Switching output	normally open

**Electrical data**

Nominal voltage [V]	10...36 DC
Current consumption [mA]	< 15
Reverse polarity protection	yes

**Outputs**

Transistor	
Current rating (continuous) [mA]	250
Current rating (peak) [mA]	250
Voltage drop [V]	< 2.5
Short-circuit proof	yes
Overload protection	yes

**Monitoring range**

Sensing range [mm]	10
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / aluminium approx. 0.4 / copper approx. 0.3

**Measuring / setting range**

Setting range [pulses/min.]	5...300
Adjustment of the switch point	multiturn potentiometer
Hysteresis [% of Sp]	10
Start-up delay [s]	15

**Reaction times**



## DI5012

DIA3010-ZPKG/5M

Evaluation systems, power supplies

Damping frequency (max.) [pulses/min]	15000
--	-------

### Environment

Ambient temperature [°C]	-25...80
Protection	IP 67

### Safety classification

MTTF [a]	898
----------	-----

### Mechanical data

Mounting	flush mountable
Housing materials	brass special coating; PBT (Pocan)
Weight [kg]	0.395

### Displays / operating elements

Input pulses LED	yellow
Output status indication LED	green


### Electrical connection

Connection	PVC cable / 5 m; 3 x 0.5 mm <sup>2</sup>
------------	--

### Wiring

Core colors

BK	black
BN	brown
BU	blue



### Remarks

Pack quantity [piece]	1
-----------------------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — DI5012 — 03.11.2016

**Article discontinued as of 31.March 2017**