E11505

Wirable plug


SSTAH040MSSFKPG



Article to be discontinued Discontinuation date: 03/31/2021

Alternative articles: EVC813

When selecting an alternative article and accessories please note that technical data may differ!

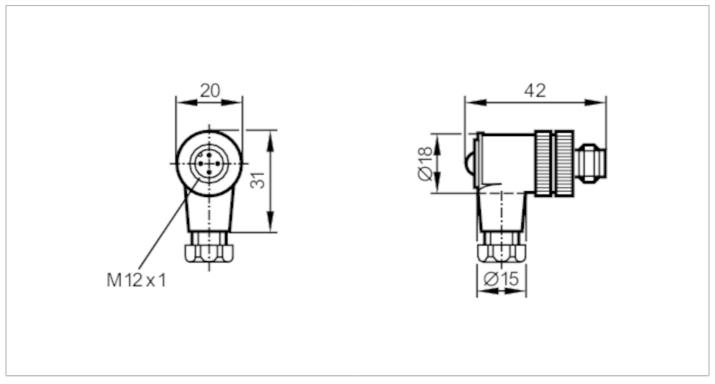

| Application | | |
|-------------------------|------|---|
| Application | | English and the last test and |
| System | | Free from silicone; gold-plated contacts |
| Free from silicone | | yes |
| Electrical data | | |
| Operating voltage | [V] | < 45 AC / < 70 DC |
| Max. current load total | [A] | 4; (40 °C) |
| Operating conditions | | |
| Ambient temperature | [°C] | -2585 |
| Protection | | IP 68 |
| Mechanical data | | |
| Weight | [g] | 25 |
| Material | | PA |
| Molded-body material | | PA |
| Material nut | | brass, nickel-plated |
| Remarks | | |
| Pack quantity | | 1 pcs. |

E11505

Wirable plug

SSTAH040MSSFKPG



Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm

Electrical connection - plug

Connector: 1 x M12, angled; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

_1 _2 _3 _4