

# EVC643



## Female cordset

ADOGF030MSS0014H03



### Application

System	Free from silicone; Halogen-free; gold-plated contacts; Drag chain suitability
Free from silicone	yes

### Electrical data

Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	3

### Operating conditions

Ambient temperature	[°C]	-25...90
Note on ambient temperature		cULus: ...85
Ambient temperature (moving)	[°C]	-25...90
Note on ambient temperature (moving)		cULus: ...85
Protection		IP 65; IP 67; IP 68; IP 69K

# EVC643



## Female cordset


ADOGF030MSS0014H03

Mechanical data		
Weight [g]	281.2	
Dimensions [mm]	10 x 10 x 31	
Material	housing: TPU (urethane) orange; sealing: FKM	
Material nut	brass, nickel-plated	
Drag chain suitability	yes	
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s <sup>2</sup>
	Bending cycles	> 5 Mio.
	Torsional strain	± 180 °/m


Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 14 m, PUR, Halogen-free, black, Ø 3.7 mm; 3 x 0.25 mm <sup>2</sup> (32 x Ø 0.1 mm )	

Electrical connection - Socket	
Connector: 1 x M8, straight; coding: A; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.3...0.5 Nm	



## Connection

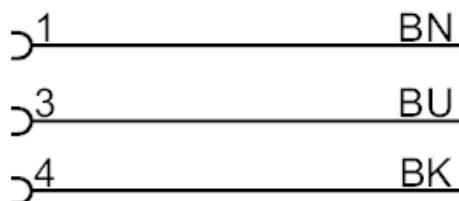

Core colors :	
BK	black
BN	brown
BU	blue