


IB5063

IBE3020-FPKG

Inductive sensors

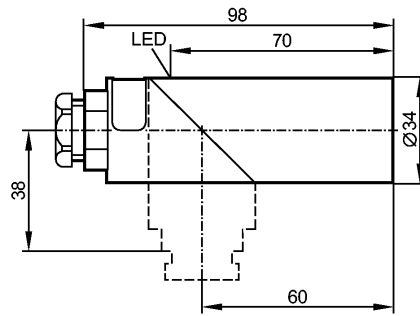

Product characteristics

Inductive sensor
Plastic housing Ø 34 mm
Terminals
Sensing range 20 mm; [nf] non-flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	15 (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 2.5
Current rating [mA]	250
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	350

Range

Sensing range [mm]	20
Real sensing range (Sr) [mm]	20 ± 10 %
Operating distance [mm]	0...16.2

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / Al approx. 0.3 / Cu approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...80
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	2450

Mechanical data

Mounting	non-flush mountable
----------	---------------------

IB5063

IBE3020-FPKG

Inductive sensors

Housing materials	PBT; end cap: polycarbonate
-------------------	-----------------------------

Weight [kg]	0.185
-------------	-------


Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	terminals up to 2.5 mm ² ; cable diameter 7...13 mm, cable gland M20 x 1.5
------------	---

Wiring



Accessories

Accessories (included)	Mounting clamp
------------------------	----------------

Remarks

Pack quantity [piece]	1
-----------------------	---