


IB5162

IBE3020-FPKG/US-100-KPX

Inductive sensors

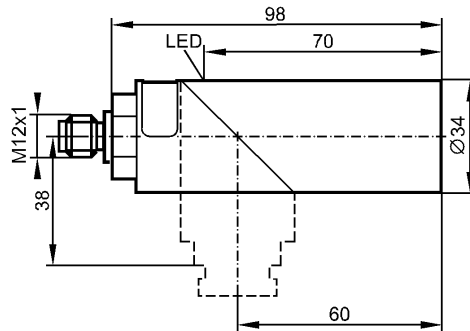

Product characteristics

Inductive sensor
Plastic housing Ø 34 mm
Quick disconnect
Sensing range 20 mm; [nf] non-flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	15 (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 2.5
Current rating [mA]	250
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	350

Monitoring range

Sensing range [mm]	20
Real sensing range (Sr) [mm]	20 ± 10 %
Operating distance [mm]	0...16.2

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / aluminium approx. 0.4 / copper approx. 0.3
Hysteresis [% of Sr]	3...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...80
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2 EN 55011:	class B
-----	---------------------------	---------

IB5162

IBE3020-FPKG/US-100-KPX

Inductive sensors

MTTF	[Years]	2450
------	---------	------

Mechanical data

Mounting	non-flush mountable	
Housing materials	PBT; end cap: polycarbonate	
Weight	[kg]	0.186


Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	M12 connector	
------------	---------------	--

Wiring



Accessories

Accessories (included)	Mounting clamp	
------------------------	----------------	--

Remarks

Pack quantity	[piece]	1
---------------	---------	---