


IG5596

IGA2008-FRKG/PH

Inductive sensors

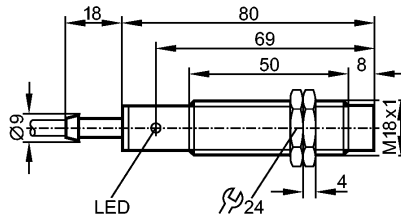

Product characteristics	
Inductive sensor	
Metal thread M18 x 1	
Cable	
Sensing range 8 mm; [nf] non-flush mountable	
Electrical data	
Electrical design	DC PNP/NPN
Operating voltage [V]	10...55 DC
Protection class	II
Reverse polarity protection	yes
Outputs	
Output function	normally open / closed programmable
Voltage drop [V]	< 4.6
Minimum load current [mA]	4
Leakage current [mA]	< 0.8
Current rating [mA]	400
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	300
Monitoring range	
Sensing range [mm]	8
Real sensing range (Sr) [mm]	8 ± 10 %
Operating distance [mm]	0...6.5
Accuracy / deviations	
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10
Environment	
Ambient temperature [°C]	-25...80
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	1806
Mechanical data	
Mounting	non-flush mountable
Housing materials	brass white bronze coated; active face: PC (polycarbonate)

IG5596

IGA2008-FRKG/PH

Inductive sensors

Weight	[kg]	0.139
--------	------	-------

Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	PUR / PVC cable / 2 m; 2 x 0.5 mm ²
------------	--

Wiring

Core colors

BK black

WH white



Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Pack quantity	[piece]	1
---------------	---------	---