
efectorioo

115284

IIA3015-BPKG Inductive sensors

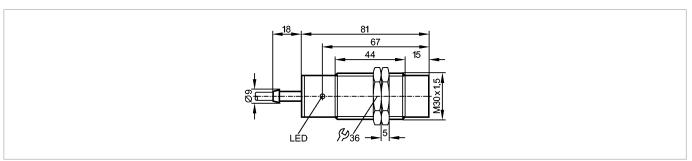

C€ [H[

Housing materials

· · LIIL		
Product characteristics		
Inductive sensor		
Metal thread M30 x 1.5		
Cable		
Sensing range 15 mm; [nf] non-flush mountable		
Electrical data		
Electrical design		DC PNP
Operating voltage	[V]	1036 DC
Current consumption	[mA]	15 (24 V)
Protection class		II
Reverse polarity protection	1	yes
Outputs		
Output function		normally open
Voltage drop	[V]	< 2.5
Current rating	[mA]	250
Short-circuit protection		yes (non-latching)
Overload protection		yes
Switching frequency	[Hz]	250
Monitoring range		
Sensing range	[mm]	15
Real sensing range (Sr)	[mm]	15 ± 10 %
Operating distance	[mm]	012.1
Accuracy / deviations		
Correction factors		mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis	[% of Sr]	115
Switch-point drift	[% of Sr]	-1010
Environment		
Ambient temperature	[°C]	-2580
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2 EN 55011: class B
MTTF	[Years]	1853
Mechanical data		
Mounting		non-flush mountable

brass white bronze coated; active face: PBT

efectorioo



Remarks
Pack quantity



0.258 Weight [kg] Displays / operating elements Output status indication LED yellow Electrical connection PVC cable / 2 m; 3 x 0.5 mm² Connection Wiring Core colors ΒN brown blue BU black BK Accessories Accessories (included) 2 lock nuts

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — II5284 — 06.03.2003

1

[piece]