


IIT210

IIKC014BASKG/M/V4A/10M

Inductive sensors

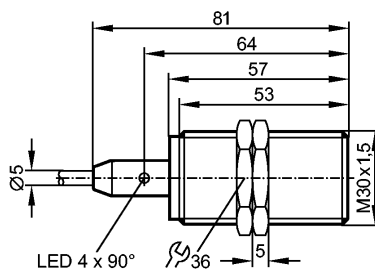

Product characteristics

Inductive sensor
Metal thread M30 x 1.5
Cable
Operation as 3-wire or 2-wire possible
Increased sensing range
Optical setting aid (2 LED)
Sensing range 14 mm; [f] flush mountable

Electrical data

Electrical design	3-wire DC PNP; 2-wire DC PNP/NPN
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 10 only in 3-wire operation
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open
Voltage drop [V]	< 2.5
Minimum load current [mA]	2; only in 2-wire operation
Leakage current [mA]	< 0.5; only in 2-wire operation
Current rating [mA]	100
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	100

Monitoring range

Sensing range [mm]	14
Real sensing range (Sr) [mm]	14 ± 10 %
Operating distance [mm]	0...11.34

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / aluminium approx. 0.4 / copper approx. 0.3
Hysteresis [% of Sr]	3...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	0...100
Protection	IP 68 / IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD:	4 kV CD / 8 kV AD
-----	-------------------	-------------------

IIT210

IIC014BASKG/M/V4A/10M

Inductive sensors

	EN 61000-4-3 HF radiated:	10 V/m
	EN 61000-4-4 Burst:	2 kV
	EN 61000-4-5 Surge:	0.5 kV (line to line, Ri: 20hm)
	EN 61000-4-6 HF conducted:	10 V
	EN 55011:	class B
MTTF	[Years]	1479

Mechanical data

Mounting	flush mountable
Housing materials	stainless steel (316L); active face: PEEK (polyether ether ketone)
Weight	[kg] 0.457

Displays / operating elements

Output status indication	LED	yellow (4 x 90°)
Setting aid	LED	red

Electrical connection

Connection	PVC cable / 10 m; 3 x 0.34 mm ²
------------	--

Wiring



Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Remarks	suitable for PLC type 1 according to IEC 61131-2
Pack quantity	[piece] 1