


KQ6008

KQ-3120NFPKG/2T/0.04M/AS

Capacitive sensors

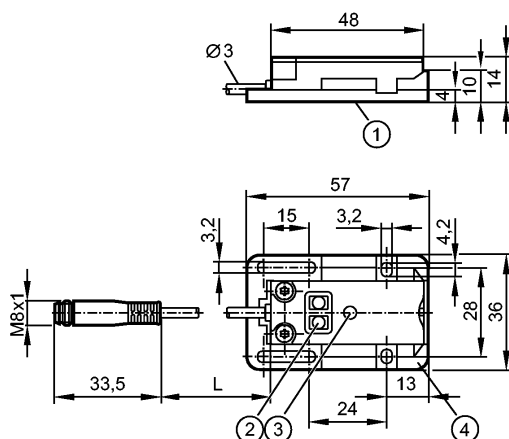

- 1: sensing face
- 2: Programming buttons
- 3: LED
- 4: Mounting adapter E12153

CE  IO-Link

Product characteristics

Capacitive sensor
 Rectangular, plastics
 Cable with connector
 Teach function
 Electronic lock
 Sensing range 12 mm; [nf] non-flush mountable

Application

Application: Position sensor and detection of dry bulk materials and liquids through non-metallic tank walls or on bypass pipes

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...30 DC
Current consumption [mA]	< 17
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 2.5
Current rating [mA]	100
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	10

Monitoring range

Sensing range [mm]	12
Real sensing range (Sr) [mm]	12 ± 10 %

Accuracy / deviations

Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-20...20

KQ6008

KQ-3120NFPKG/2T/0.04M/AS

Capacitive sensors

Interfaces

IO-Link Device	
Transfer type	COM1 (4.8 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9 CDV
IO-Link Device ID	371d / 000173h
Profiles	Smart Sensor
SIO mode	yes
Process data analogue	-
Min. process cycle time [ms]	100.8

Environment

Ambient temperature [°C]	-25...80
Protection	IP 65 / IP 67

Tests / approvals

EMC	EN 61000-4-2 ESD: 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 3 V EN 55011: class B
Shock resistance	30 g / 6 shocks / 11 ms half-sine (x,y,z) EN 60068-2-27:
Vibration resistance	(10...55 Hz) / 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz EN 60068-2-6:
MTTF [Years]	725

Mechanical data

Mounting	non-flush mountable
Housing materials	housing: PBT (glass fiber reinforced); buttons: TPE-U; cover: PC (glass fiber reinforced)
Weight [kg]	0.078


Displays / operating elements

Output status indication LED	yellow
------------------------------	--------

Electrical connection

Connection	PVC cable / 0.04 m; with M8 connector
------------	---------------------------------------

Wiring



4: OUT / IO-Link

Accessories

Accessories (included)	premounted to KQ mounting adapter (E12153)
------------------------	--

Remarks

Pack quantity [piece]	1
-----------------------	---