


LMT121

LMACE-A12E-QSKG-2/US

Level sensors

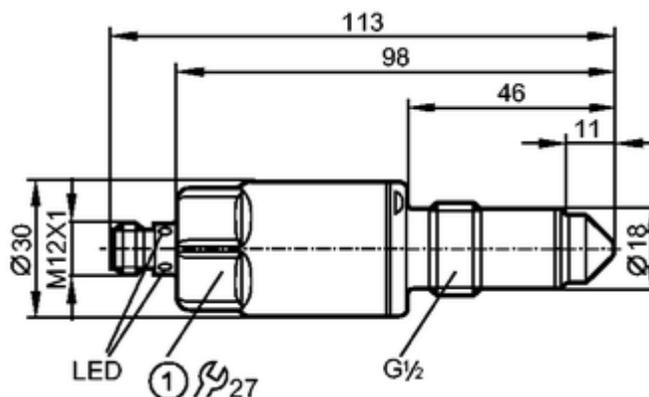

1: tightening torque 20...25 Nm



Product characteristics

Electronic level sensor

Connector

Process connection: G 1/2 A

Gold-plated contacts

Probe length: 11 mm

Communication interface: IO-Link 1.1

2 switching outputs

Application

Application	liquids, viscous media and powders
Recommended media	Media with low water content
Cannot be used for:	See the operating instructions, chapter "Function and features".
Medium temperature oil	
- Continuous [°C]	-40...100
- Short time [°C]	-40...150 (1 h)
Medium temperature water and hydrous media	
- Continuous [°C]	-40...85
- Short time [°C]	-40...150 (1 h)

Electrical data

Electrical design	DC PNP/NPN
Operating voltage [V]	18...30 DC
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes

Outputs

Output	2 switching outputs
Output function	2 x normally open / closed programmable
Current rating [mA]	100
Voltage drop [V]	< 2.5
Short-circuit protection	pulsed

Overload protection	yes
---------------------	-----

Measuring / setting range

Factory setting	Media with low water content
-----------------	------------------------------

Interfaces

IO-Link device

Transfer type	COM2 (38.4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
IO-Link device ID	0x000132
Profiles	Smart Sensor: Process Data Variable; Device Identification
SIO mode	yes
Required master port class	A
Process data analogue	1
Process data binary	2
Min. process cycle time [ms]	2.3

Environment

Ambient temperature [°C]	-40...85, at max. 100 °C medium temperature (-40...60 °C at max. 150 °C medium temperature)
Storage temperature [°C]	-40...85
Maximum vessel pressure [bar]	-1...40 *)
Protection	IP 68 / IP 69K

Tests / approvals

EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-4	: open tanks
	DIN EN 61000-6-3	: closed tanks
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [Years]		223
UL approval number		H001

Mechanical data

Process connection	G ½ A
Materials (wetted parts)	PEEK; surface characteristics: Ra < 0.8
Housing materials	stainless steel (316L / 1.4404); PEEK; PEI; FKM
Weight [kg]	0.208

Displays / operating elements


Display	Switching status	LEDs yellow
	Operating status	LEDs green

Electrical connection

Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

Wiring

Core colours	
BK	black
BN	brown
BU	blue
WH	white



OUT1: Switching output / IO-Link / Teach

OUT2: Switching output

Colours to DIN EN 60947-5-2

Remarks

Remarks

*) MAWP (for applications according to CRN): 40 bar (4 MPa)

Pack quantity [piece]

1

ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — GB — LMT121 — 21.10.2015