


**OG5119**

OGH-FPKG/V4A/US-100

Photoelectric sensors



1: pushbutton



**Product characteristics**

Diffuse reflection sensor

Threaded type

M18 x 1

Quick disconnect

Background suppression

gold-plated contacts

Range 30...130mm (Range referred to white paper 200 x 200 mm, 90 % remission)

adjustable

**Electrical data**

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	< 40
Type of light	red light 660 nm
Protection class	II
Reverse polarity protection	yes

**Outputs**

Output function	light-on / dark-on programmable
Voltage drop [V]	< 2.5
Current rating [mA]	150; 200 (...60 °C)
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	250

**Monitoring range**


Range [mm]	30...130 (Range referred to white paper 200 x 200 mm, 90 % remission)
Light spot diameter [mm]	12 ( at maximum range )

**Background suppression chart**

**OG5119**

OGH-FPKG/V4A/US-100

Photoelectric sensors

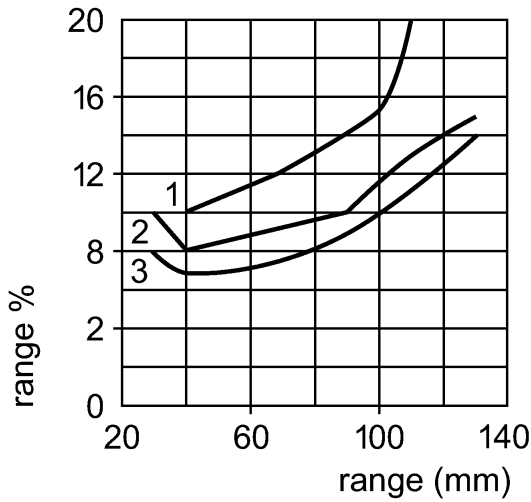

1 = object black 6 % remission, background white 90 % remission  
 2 = object gray 18 % remission, background white 90 % remission  
 3 = object white 90 % remission, background white 90 % remission  
 Note: range % = setting in % of the range

**Environment**

Ambient temperature	[°C]	-20...80
Protection		IP 68 / IP 69K

**Tests / approvals**

EMC		EN 60947-5-2 EN 55011:	class B
MTTF	[Years]		521

**Mechanical data**

Housing materials		stainless steel 316L / 1.4404; PBT
Lens material		PMMA
Weight	[kg]	0.068

**Displays / operating elements**



Output status indication	LED	yellow
Power	LED	green
Function display	LED	red

**Electrical connection**

Connection		M12 connector; gold-plated contacts
------------	--	-------------------------------------

**Wiring**

n.c. = not connected



**Accessories**

Accessories (included)		2 lock nuts
------------------------	--	-------------

**Remarks**

Remarks		cULus - Class 2 source required
---------	--	---------------------------------

Pack quantity	[piece]	1
---------------	---------	---