


**OPU200**

OPU-FCKG/AS

Photoelectric sensors

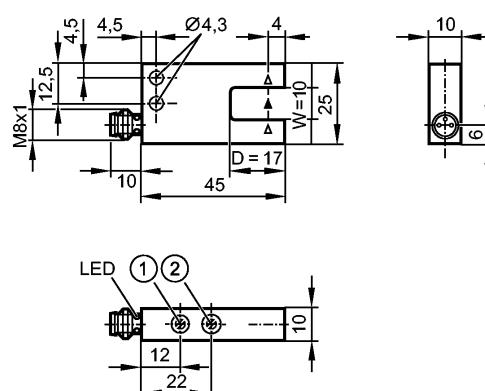

1: output function switch

2: potentiometer sensitivity

CE

Product characteristics

Optical fork sensor

Quick disconnect

Automatic detection PNP/NPN

Electrical data

Electrical design	DC PNP/NPN
Operating voltage [V]	10...35 DC
Current consumption [mA]	< 40
Type of light	Infrared light 880 nm
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	light-on/dark-on mode selectable
Voltage drop [V]	< 2.8
Current rating [mA]	200
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	10000

Monitoring range

Smallest detectable object [mm]	0.3
---------------------------------	-----

Environment

Ambient temperature [°C]	-25...60
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2
MTTF [Years]	659

Mechanical data

Fork depth D [mm]	17
Fork width W [mm]	10
Housing materials	housing: diecast zinc black anodized; lens: glass
Weight [kg]	0.054

Displays / operating elements

**OPU200**


OPU-FCKG/AS

Photoelectric sensors

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	M8 connector
------------	--------------

Wiring**Remarks**

Pack quantity	[piece]	1
---------------	---------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OPU200 — 30.04.2009