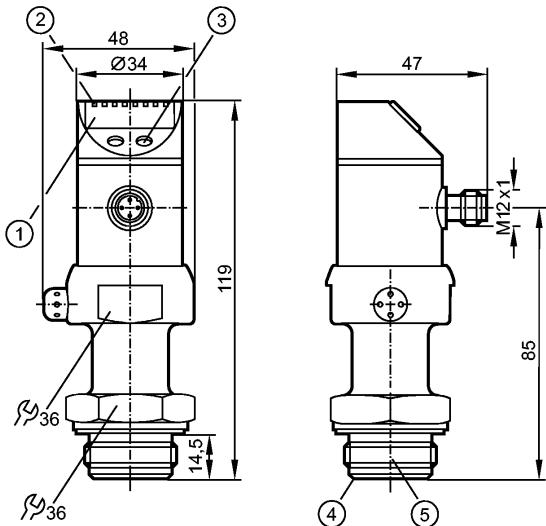


PI1098

PI-25BRES30-E-ZVG/US/ /P

Pressure sensors



1: 4-digit alphanumeric display

2: status LEDs

3: Programming button

4: Aseptoflex sealing edge

5: Aseptoflex thread

**Product characteristics**

Programmable pressure transmitter

Quick disconnect

no dead space

Freely rotatable housing 350°

2-wire connection technology

Zero and span adjustable

Process connection: for Aseptoflex adapter

Analog output

4-digit alphanumeric display

Measuring range: -12.4...250.0 mbar

Application

Application

Type of pressure: relative pressure
 Hygienic systems, viscous media and liquids with suspended particles
 Liquids and gases

Pressure rating

[mbar]

10000

Bursting pressure min.

[mbar]

30000

Medium temperature

[°C]

-25...125 (145 max. 1h)

Electrical data

Electrical design

DC

Operating voltage

[V]

20...32 DC

Switch-on peak current

[mA]

60 (30 ms)

Insulation resistance

[MΩ]

> 100 (500 V DC)

Protection class

III

Reverse polarity protection

yes

Outputs

Output

Analog output

**PI1098**

PI-25BRES30-E-ZVG/US/ /P

Pressure sensors

Output function		4...20 (20...4) mA analog (scaleable 1:4)
Overload protection		yes
Analog output		I: 4...20 mA (Ineg: 20...4 mA)
Max. load	[Ω]	max. 300

Measuring / setting range

Display unit		mbar, kPa, inH2O, mmWS, % der Spanne
Measuring range	[mbar]	-12.4...250.0
Setting range		
Analog start point, ASP	[mbar]	-12.4...187.4
Analog end point, AEP	[mbar]	50.0...250.0
in steps of	[mbar]	0.02
Factory setting		ASP = 0.0 mbar; AEP = 250.0 mbar

Accuracy / deviations

Accuracy / deviations (in % of the span) Turn down 1:1		
Characteristics deviation *)		< ± 0.2
Linearity		< ± 0.15
Hysteresis		< ± 0.15
Repeatability **)		< ± 0.1
Long-term stability ***)		< ± 0.1
Temperature coefficients (TEMPCO) in the temperature range 0...70° C (in % of the span per 10 K)		
Greatest TEMPCO of the zero point		< ± 0.05
Greatest TEMPCO of the span		< ± 0.15

Reaction times

Power-on delay time	[s]	0.5
Damping for the analog output (dAA)	[s]	0.1...100.0
Response time analog output	[ms]	40
Integrated watchdog		yes

Environment

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67 / IP 69K

Tests / approvals

EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-5 Surge: EN 61000-4-6 HF conducted:	4 kV CD / 8 kV AD 10 V/m 2 kV 0.5/1 kV 10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF	[Years]	259

Mechanical data

Process connection		for Aseptoflex adapter
Materials (wetted parts)		ceramics (99.9 % Al2 O3); PTFE; stainless steel 316L / 1.4435; surface characteristics: Ra < 0.4 / Rz 4
Housing materials		stainless steel 316L / 1.4404; PC (Makrolon); PBT (Pocan); PEI; FPM (Viton); PTFE

PI1098

PI-25BRES30-E-ZVG/US/ /P

Pressure sensors



Min. pressure cycles		100 million
Weight	[kg]	0.395

Displays / operating elements

Display	Display unit 6 x LED green Function display 4-digit alphanumeric display Measured values 4-digit alphanumeric display
---------	---

Electrical connection

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

Wiring

1: Normal operation

2: Programming operation (P = communication via EPS / FDT interface)

Remarks

Remarks	<ul style="list-style-type: none"> *) linearity, incl. hysteresis and repeatability; (limit value setting to DIN 16086) **) with temperature fluctuations < 10 K ***) in % of the span per year The 3-A qualification is only valid if adapters with 3-A qualification are used for installation.
---------	--

Pack quantity	[piece]	1
---------------	---------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — PI1098 — 20.11.2012