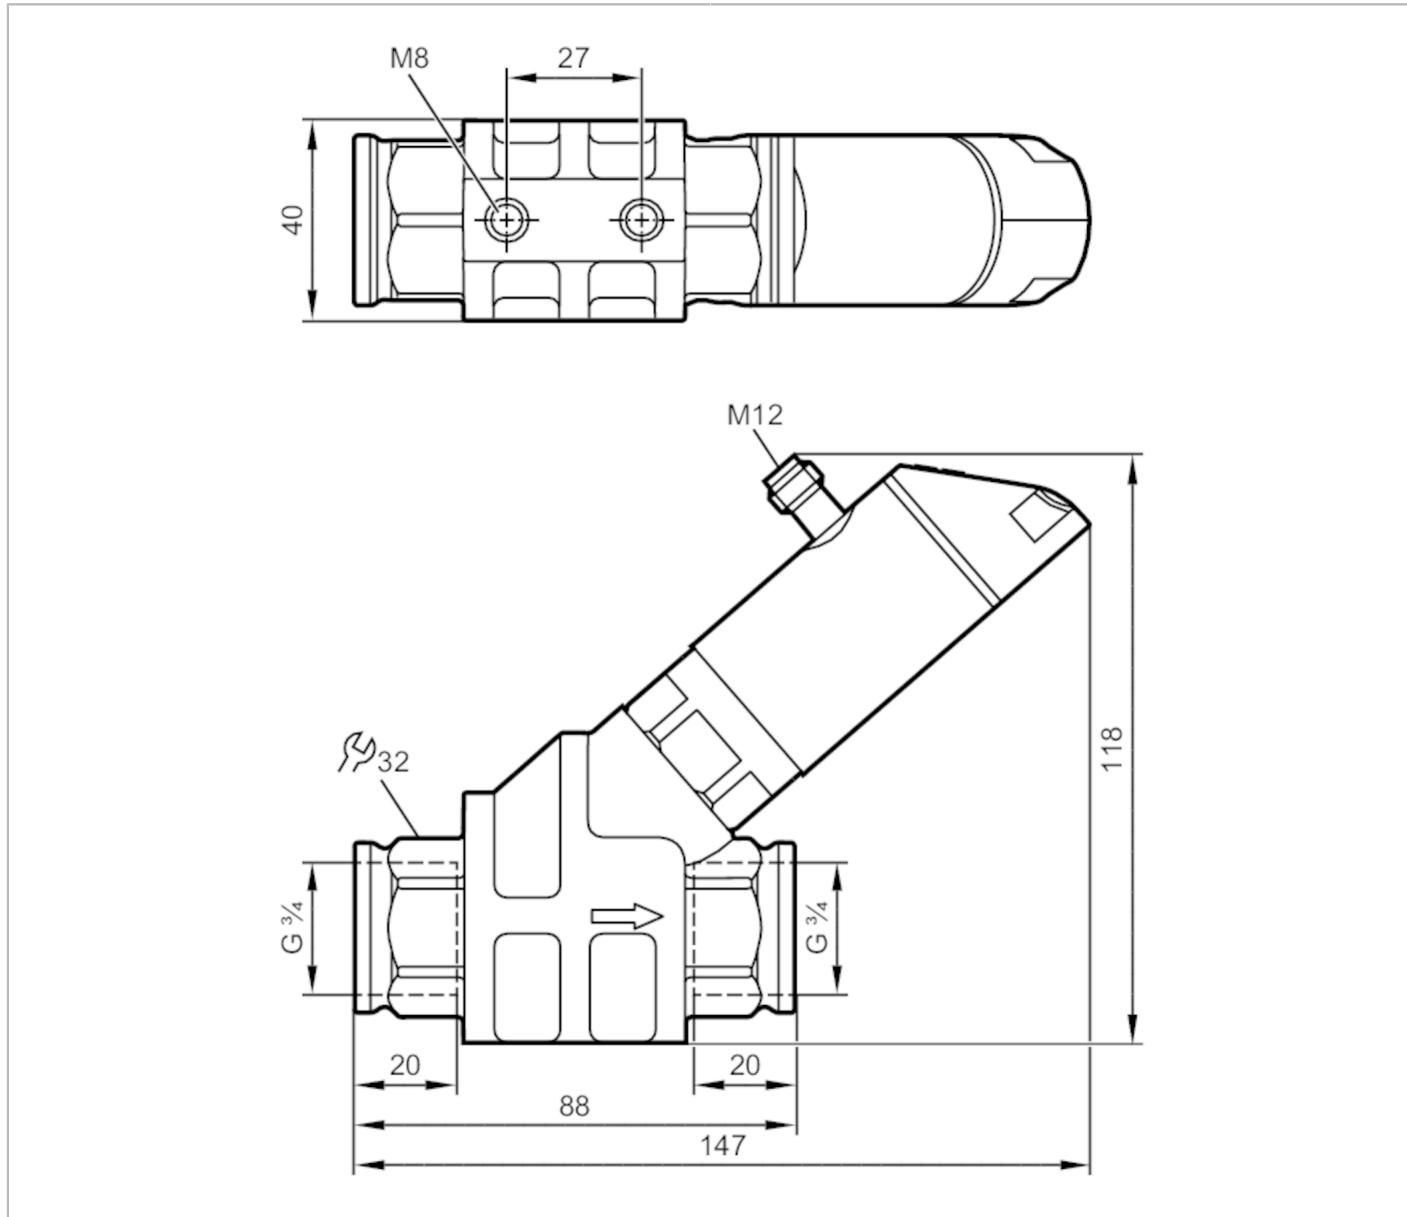


Flow meter with fast response and display

SBG34KL0FRKG

**Product characteristics**

Measuring range	1...50 l/min	0.06...3 m³/h	16...793 gph	0.26...13.2 gpm
Process connection	threaded connection G 3/4 Internal thread			


Application

System	gold-plated contacts		
Media	Liquids; oils (viscosity 46 mm²/s at 40 °C)		
Medium temperature [°C]		-10...100	
Pressure rating [bar]		100	
Pressure rating [Mpa]		10	
Note on pressure rating	at medium temperature >70°C: 80 bar / 8 MPa		

SB2234

Flow meter with fast response and display

SBG34KL0FRKG



Electrical data				
Operating voltage	[V]		18...30 DC; (to SELV/PELV)	
Current consumption	[mA]		< 50	
Protection class			III	
Reverse polarity protection			yes	
Power-on delay time	[s]		< 3	
Outputs				
Total number of outputs			2	
Output signal			switching signal; analog signal; frequency signal; IO-Link	
Output function			normally open / closed; (configurable)	
Max. voltage drop switching output DC	[V]		2	
Max. current load per output	[mA]		150; (200: ...60 °C; Ambient temperature; 250: ...40 °C; Ambient temperature)	
Analog current output	[mA]		4...20	
Max. load	[Ω]		500	
Short-circuit protection			yes	
Overload protection			yes	
Frequency of the output	[Hz]		0...10000	
Measuring/setting range				
Measuring range		1...50 l/min	0.06...3 m³/h	16...793 gph
Display range		0...60 l/min	0...3.6 m³/h	0...15.86 gpm
Resolution		0.01 l/min	0.001 m³/h	1 gph
Set point SP		0.35...50 l/min	0.02...3 m³/h	5...793 gph
Reset point rP		0...49.65 l/min	0...2.98 m³/h	0...787 gph
Frequency end point, FEP		3.35...50 l/min	0.2...3 m³/h	53...793 gph
In steps of		0.05 l/min	0.005 m³/h	1 gph
Frequency at the end point FRP	[Hz]		10...10000	
In steps of	[Hz]		10	
Measuring dynamics			1:50	
In steps of			10 Hz	
Temperature monitoring				
Measuring range		-10...100 °C		14...212 °F
Display range		-32...122 °C		-25.6...251.6 °F
Resolution		0.1 °C		0.1 °F
Set point SP		-9.3...100 °C		15.2...212 °F
Reset point rP		-10...99.3 °C		14...210.8 °F
In steps of		0.1 °C		0.2 °F
Frequency start point, FSP		-10...78 °C		14...172.4 °F
Frequency end point, FEP		12...100 °C		53.6...212 °F
Frequency at the end point FRP	[Hz]		10...10000	

SB2234



Flow meter with fast response and display

SBG34KL0FRKG

Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)		± 5 % MEW; (Q > 1 l/min; 20...70 °C Medium temperature)
Repeatability		± 1 % MEW
Temperature monitoring		
Temperature drift		0,029 °C / K
Accuracy [K]		3 K (25°C; Q > 1 l/min)
Reaction times		
Flow monitoring		
Response time [s]		0.01
Damping process value dAP [s]		0...5
In steps of [s]		0.1
Damping for the analog output dAA [s]		0...5
In steps of [s]		0.1
Temperature monitoring		
Dynamic response T05 / T09 [s]		T09 = 120 (Q > 1 l/min)
Software / programming		
Parameter setting options		hysteresis / window; normally open / closed; switching logic; current/frequency output; damping for the switching output / analog output; display can be rotated and switched off; standard unit of measurement; process value color; calibration factor
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9 CDV
Profiles		Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis
SIO mode		yes
Required master port class		A
Process data analog		2
Process data binary		2
Min. process cycle time [ms]		3.2
Supported DeviceIDs	Type of operation	DeviceID
	default	1045
Operating conditions		
Ambient temperature [°C]		0..60
Note on ambient temperature		medium temperature < 80 °C medium temperature < 100 °C: 0...40 °C
Storage temperature [°C]		-15...80
Protection		IP 65; IP 67

SB2234



Flow meter with fast response and display


SBG34KL0FRKG

Tests / approvals				
EMC	DIN EN 61000-6-2			
	DIN EN 61000-6-3			
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)		
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)		
MTTF [years]		145		
UL approval	UL approval number	I005		
Pressure equipment directive	sound engineering practice			
Mechanical data				
Weight [g]		991.5		
Material	stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC; brass chemically nickel-plated			
Materials (wetted parts)	stainless steel (1.4401 / 316); stainless steel (1.4404 / 316L); brass (2.0371); brass chemically nickel-plated; PPS; O-ring: FKM			
Process connection	threaded connection G 3/4 Internal thread			
Switching cycles mechanical	10 million			
Displays / operating elements				
Display	Display unit	6 x LED, green		
	Switching status	2 x LED, yellow		
	Measured values	alphanumeric display, red/green alternating indication 4-digit		
	Programming	alphanumeric display, 4-digit		
Remarks				
Remarks	Use of 200 micron filtration is recommended.			
	All data refer to oil with the following nominal viscosity:			
	46 mm ² /s, 40 °C			
	MW = Measured value			
	MEW = Final value of the measuring range			
Pack quantity	1 pcs.			
Electrical connection				
Connector: 1 x M12; coding: A; Contacts: gold-plated				
				

Flow meter with fast response and display

SBG34KL0FRKG

Connection

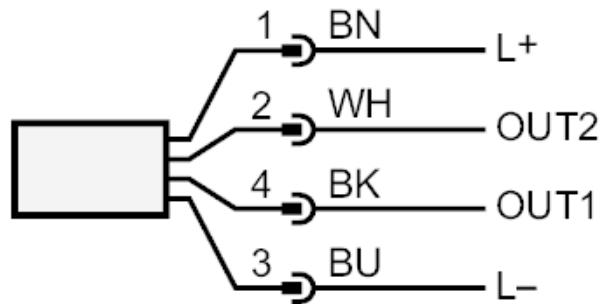

OUT1:

- Switching output Volumetric flow quantity monitoring
- Switching output Temperature monitoring
- Frequency output Volumetric flow quantity monitoring
- Frequency output Temperature monitoring
- IO-Link

OUT2:

- Switching output Volumetric flow quantity monitoring
- Switching output Temperature monitoring
- analog output Volumetric flow quantity monitoring
- analog output Temperature monitoring
- Colors to DIN EN 60947-5-2
- Core colors :

BK = black

BN = brown

BU = blue

WH = white

Flow meter with fast response and display

SBG34KL0FRKG

Diagrams and graphs