


**SF5701**

SFD10ADT /US-100

Flow sensors

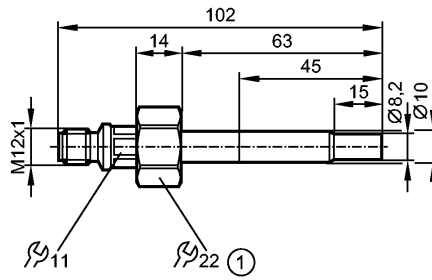

1: internal thread M18 x 1.5



**Product characteristics**

Flow sensor for connection to evaluation units

for adapter

Quick disconnect

Process connection: internal thread M18 x 1.5 for adapter (titanium)

**Application**

Application: liquids and gases, aggressive media

Pressure rating [bar]: 100

Medium temperature [°C]: -25...80

**Electrical data**

Connection to control monitor: VS3000

**Measuring / setting range**

Liquids

Setting range [cm/s]: 3...300

Greatest sensitivity [cm/s]: 3...60

Gases

Setting range [cm/s]: 200...3000

Greatest sensitivity [cm/s]: 200...800

**Accuracy / deviations**

Max. temperature gradient of medium [K/min]: 300

**Reaction times**

Response time [s]: 1...10

**Environment**

Protection: IP 67

**Tests / approvals**

Shock resistance: DIN IEC 68-2-27: 50 g (11 ms)

Vibration resistance: DIN IEC 68-2-6: 10 g (55...2000 Hz)

MTTF [Years]: 8393.77

**Mechanical data**

Process connection: internal thread M18 x 1.5 for adapter (titanium)

Materials (wetted parts): titanium (3.7035); O-ring: FKM 8 x 1.5 gr 80° Shore A

Housing materials: titanium (3.7035); EPDM; ULTEM

Probe length L [mm]: 63

Weight [kg]: 0.058

**Electrical connection**



## SF5701



SFD10ADT /US-100

Connection	M12 connector
Max. cable length [m]	100 (5 x 0.5mm <sup>2</sup> )

### Wiring

Core colors

BN brown  
 BU blue  
 BK black  
 WH white  
 GY grey



**Remarks**

Pack quantity [piece]	1
-----------------------	---