


efector 300**SI5007**

SID10ADBFPKG/US-100

Flow sensors

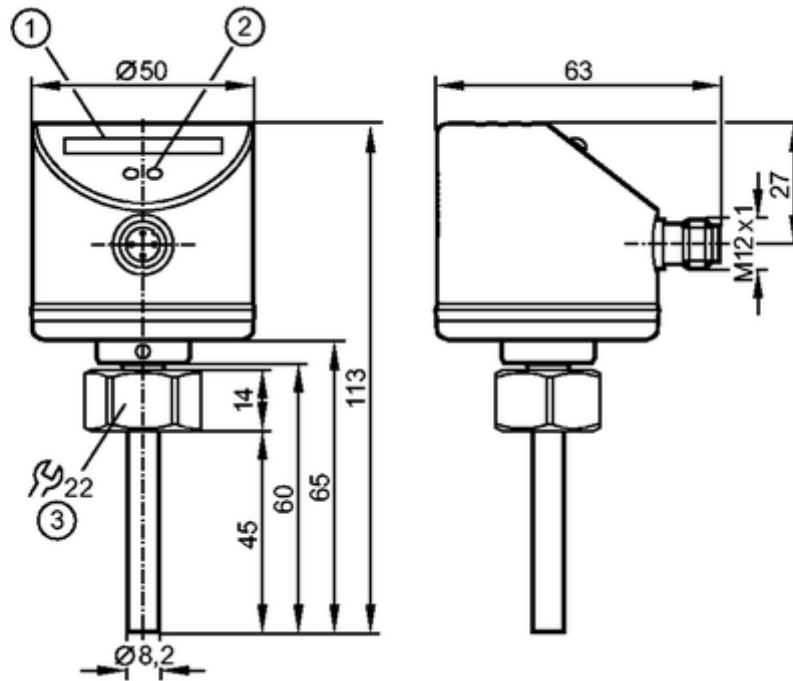

- 1: LED display
 2: setting pushbutton
 3: tightening torque 25 Nm

**Product characteristics**

Flow monitor
Compact type for adapter
Process connection: internal thread M18 x 1.5 for adapter
Probe length: 45 mm
2 switching outputs
OUT1: flow monitoring
OUT2: temperature monitoring
Setting range: 3...300 cm/s (liquids)

Application

Application	liquids and gases
Pressure rating [bar]	300
Medium temperature [°C]	-25...80

Electrical data

Electrical design	DC PNP
Operating voltage [V]	18...36 DC
Current consumption [mA]	< 60
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	2 x normally open / closed programmable
-----------------	---

Current rating [mA]	2 x 250
Voltage drop [V]	< 2.5
Short-circuit protection	yes (non-latching)
Overload protection	yes

Measuring / setting range

Liquids

Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...100

Gases

Setting range [cm/s]	200...3000
Greatest sensitivity [cm/s]	200...800

Temperature monitoring

Setting range [°C]	2...80
--------------------	--------

Accuracy / deviations

Switch point accuracy [cm/s]	$\pm 2... \pm 10$ *)
Hysteresis [cm/s]	2...5 *)
Repeatability [cm/s]	1...5 *)
Temperature drift [cm/s x 1/K]	0.1 **)
Max. temperature gradient of medium [K/min]	300

Temperature monitoring

Switch point accuracy [K]	± 3 (v > 5cm/s) ***)
Hysteresis [K]	2
Repeatability [K]	± 2
Response time temperature (typ.) [s]	5
Resolution [K]	1

Reaction times

Power-on delay time [s]	10
Response time [s]	1...10

Software / programming

Adjustment of the switch point	pushbuttons
--------------------------------	-------------

Interfaces

IO-Link Device

Transfer type	COM2 (38.4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
IO-Link Device ID	53 d / 00 00 35 h
Profiles	Smart Sensor: Process Data Variable; Device Identification
SIO mode	yes
Required master port class	A
Process data analogue	2
Process data binary	2
Min. process cycle time [ms]	3.0

Environment

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-25...100
Protection	IP 65 / IP 67


Tests / approvals	
EMC	DIN EN 60947-5-9
Shock resistance	DIN IEC 60068-2-27: 50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6 20 g (55...2000 Hz)
MTTF [Years]	277

Mechanical data	
Process connection	internal thread M18 x 1.5 for adapter
Materials (wetted parts)	stainless steel 316L / 1.4404; O-ring: FKM 8 x 1.5 gr 80° Shore A
Housing materials	stainless steel 316L / 1.4404; V2A (1.4310); PC (polycarbonate); PBT-GF 20; EPDM/X
Probe length L [mm]	45
Weight [kg]	0.238

Displays / operating elements	
Function display LED	10 LEDs, three-colour

Electrical connection	
Connection	M12 connector

Wiring



Pin 2: OUT 2 = Temperature monitoring
 Pin 4: OUT 1 = Flow monitoring
 Pin 4: IO-Link

Remarks	
Remarks	*) for water; 5...100 cm/s; 25°C (factory setting) **) for water; 5...100 cm/s; 10...70°C ***) liquids
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — SI5007 — 25.11.2014