

RT ROOM THERMOSTATS

FEATURES

- Modern styling
- Compact design
- High performance
- Simple operation
- Incorporates pre-setting facility
- BEAB approved
- Optional pattress available

ASSOCIATED PRODUCTS

MOTORIZED VALVES

ELECTRONIC PROGRAMMERS

SENSORS

THERMOSTATIC RADIATOR VALVES

SURFACE THERMOSTATS

SUNVIC

SUNVIC CONTROLS LIMITED
Bellshill Road, Uddingston
Glasgow G71 6NP,
Scotland, UK.

Telephone: +44 (0)698 812944

Telex: 778472

Fax: +44 (0)698 813637

Sunvic Controls Limited reserve the right to alter specifications, design and materials of products without prior notification.

RT ROOM THERMOSTATS

TECHNICAL DATA

TEMPERATURE SETTINGS

Range	0°C to 30°C
Graduations	5°C intervals
Stops	2.5°C increments

OPERATING TEMPERATURE


Minimum	0°C
Maximum	50°C

ELECTRICAL



Supply	220-240 AC 50Hz
Contacts	6.0 amps (resistive) 1.5 amps (inductive)

DIMENSIONS


The outline dimensions are detailed in the drawings below.

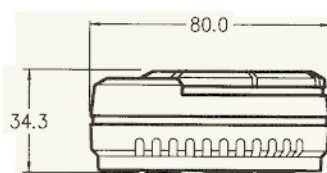


SURFACE MOUNTING

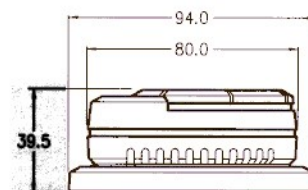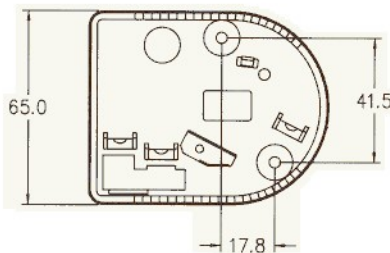

CONDUIT MOUNTING

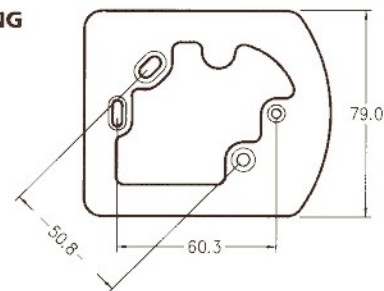

RT 14

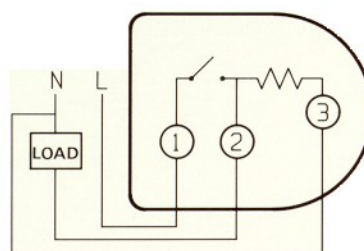

RT 16

