


TA2802

TA-030CLEC01- - /US

Temperature sensors

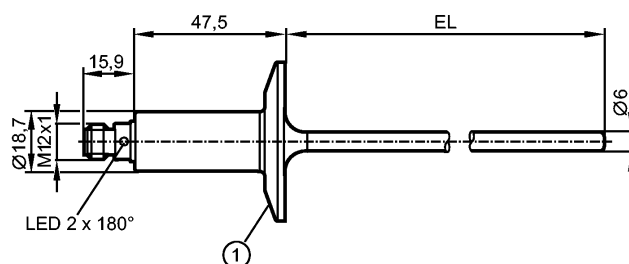

1: 1.5" clamp (ISO 2852)



EC 1935/2004 EHEDG Certified


Product characteristics

Temperature transmitter

Process connection: 1.5" clamp (ISO 2852)

Installation length EL: 30 mm

Suitable for direct installation

Analog output

Measuring range: -50...200 °C

Measuring element: 1 x Pt 1000, to DIN EN 60751, class A

Factory setting: 0...200 °C

Application

Application	liquids and gases
Pressure rating [bar]	100
Vacuum resistance [mbar]	-1000

Electrical data

Electrical design	DC
Operating voltage [V]	18...32 DC; cULus - Class 2 source required
Current consumption [mA]	< 50
Protection class	III
Reverse polarity protection	yes

Outputs

Output	Analog output
Output function	4...20 mA analog
Short-circuit protection	yes
Overload protection	yes
Analog output	4...20 mA
Max. load [Ω]	250 (18...19 V); 300 (19...32 V)

Measuring / setting range

Measuring range °C	-50...200
Factory setting	0...200 °C
Resolution	
Analog output [K]	≤ 0.04

Accuracy / deviations

Analog output [K]	± 0.3 + (± 0.1 % MS)
Temperature coefficients (in % of the span per 10 K)	0.1 *)

Reaction times

TA2802

TA-030CLEC01- - /US

Temperature sensors

Power-on delay time	[s]	2
Dynamic response	T05 / T09 [s]	< 0.5 / < 2

Interfaces

IO-Link Device	
Transfer type	COM2 (38.4 kBaud)
IO-Link revision	1.1

Environment

Ambient temperature	[°C]	-25...80, at max. 160 °C medium temperature (-25...60 °C at max. 200 °C medium temperature)
Storage temperature	[°C]	-40...100
Protection		IP 67 / IP 68 / IP 69K

Tests / approvals

EMC		DIN EN 61000-6-2 DIN EN 61000-6-3
Shock resistance		DIN IEC 68-2-27: 50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6: 10 g (10...2000 Hz)
MTTF	[Years]	232


Mechanical data

Process connection		1.5" clamp (ISO 2852)
Materials (wetted parts)		stainless steel 316L / 1.4404; surface characteristics: Ra < 0.8 / electropolished
Probe diameter	[mm]	6
Installation length EL	[mm]	30
Housing materials		stainless steel 316L / 1.4404; PEI; FKM
Weight	[kg]	0.218

Electrical connection

Connection		M12 connector
------------	--	---------------

Wiring

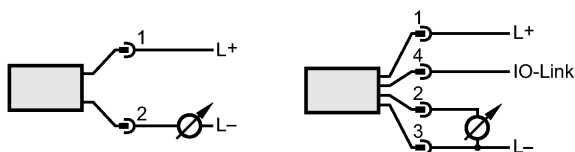

Remarks

Remarks		MS = set measuring span *) In case of deviation from the reference condition 25 ± 5 °C The values for accuracy apply to flowing water.
Pack quantity	[piece]	1