


TS2789

TS-PT100-SCREW-IN M5/2M PUR

Temperature sensors

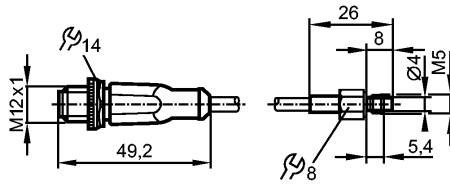

Product characteristics

Temperature sensor for connection to evaluation units

Screw-in sensor M5

Cable with connector

gold-plated contacts

Connection to control monitor TP / TR

Measuring range: -40...90 °C / -40...194 °F

Measuring element: 1 x Pt 100, to DIN EN 60751, class A

Application

Application Contact sensor for solid bodies

Electrical data

Connection to control monitor TP / TR

Protection class III

Measuring / setting range

Measuring range -40...90 °C -40...194 °F

Accuracy / deviations

Accuracy ± (0.15 K + 0.002 x |t|)

Reaction times

Dynamic response T05 / T09 [s] 3 / 8 *)

Environment

Protection IP 67

Tests / approvals

Shock resistance DIN EN 60068-2-27 50 g (11 ms)

Vibration resistance DIN EN 60068-2-6 10 g (10...2000 Hz)

Mechanical data

Housing materials stainless steel 316L / 1.4404


Tightening torque [Nm] 1.5

Weight [kg] 0.083

Electrical connection

Connection PUR cable / 2 m; with M12 connector

Wiring



Remarks



TS2789

TS-PT100-SCREW-IN M5/2M PUR

Temperature sensors

Remarks	*) according to DIN EN 60751
---------	------------------------------

Pack quantity	[piece]	1
---------------	---------	---