


**efector600****TT1250**

TT-100KBBD06- /US/ /V

Temperature sensors

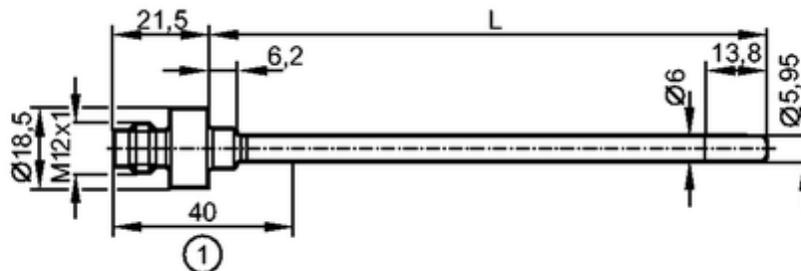

1: plug area

L = probe length (corresponds to installation length EL)

**Product characteristics**

Temperature sensor for connection to evaluation units

Quick disconnect

Installation length EL: 160 mm

gold-plated contacts

Connection to control monitor TP / TR

Measuring range: -40...150 °C / -40...302 °F

Measuring element: 1 x Pt 1000, to DIN EN 60751, class A

**Application**

Application liquids and gases

Pressure rating [bar] 160

Minimum installation depth [mm] 15

**Electrical data**

Connection to control monitor TP / TR

Protection class III

**Measuring / setting range**

Measuring range -40...150 °C -40...302 °F

**Accuracy / deviations**Accuracy  $\pm (0.15 \text{ K} + 0.002 \times |t|)$ **Reaction times**

Dynamic response T05 / T09 [s] 1 / 3 \*

**Environment**

Ambient temperature [°C] -25...80, for the plug area

Storage temperature [°C] -40...100

Protection IP 68 / IP 69K

**Tests / approvals**

Shock resistance DIN EN 60068-2-27 50 g (11 ms)

Vibration resistance DIN EN 60068-2-6 10 g (10...2000 Hz)

MTTF [Years] 22831

**Mechanical data**

Materials (wetted parts)	stainless steel 316L / 1.4404
Probe diameter [mm]	6
Probe length L [mm]	160
Installation length EL [mm]	160
Housing materials	stainless steel 316L / 1.4404
Weight [kg]	0.04

**Electrical connection**

Connection	M12 connector; gold-plated contacts
------------	-------------------------------------

**Wiring**



**Remarks**

Remarks	*) according to DIN EN 60751 The values for accuracy apply to flowing water.
---------	---

Pack quantity [piece]	1
-----------------------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — TT1250 — 09.05.2012