




UGT515

UGA01600HOKG/US

Ultrasonic sensors

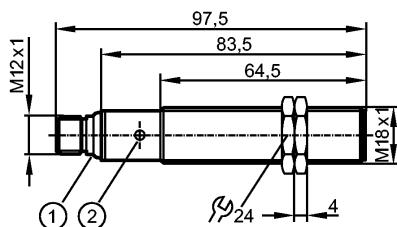

1: LEDs

2: teach button



Product characteristics

Ultrasonic diffuse-reflection sensor

Threaded type

M18 x 1

Quick disconnect

Teach function

Electrical data

Electrical design	DC NPN
Operating voltage [V]	10...30 DC; cULus - Class 2 source required
Current consumption [mA]	55
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 0.3
Converter frequency [kHz]	230

Inputs


Teach	yes
-------	-----

Outputs

Output function	2 x normally open / closed programmable
Current rating [mA]	100
Voltage drop [V]	2.2
Short-circuit protection	yes
Overload protection	yes
Switching frequency [Hz]	3

Monitoring range

Sensing range [mm]	1600
blind zone [mm]	150

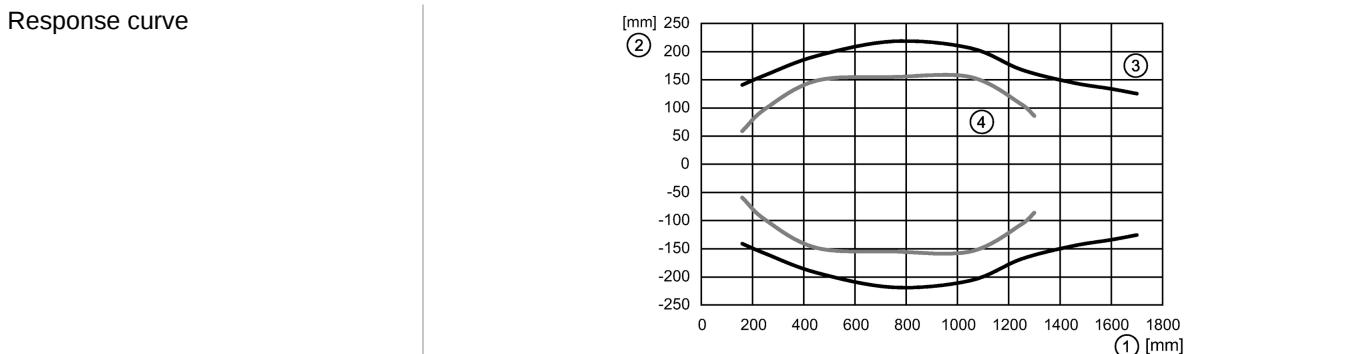

1: Distance; 2: Sound beam; 3: Target 200 x 200 mm; 4: Target Ø 25 mm

Angle of aperture [°]	7 ± 2
-----------------------	-------



UGT515

UGA01600HOKG/US

Ultrasonic sensors

Max. deviation from the 90° angle sensor / object	[°]	± 4
Accuracy / deviations		
Notes on the accuracy / deviation		The indicated values are reached after a warm-up time of ≥ 20 minutes
Temperature compensation		yes
Hysteresis	[%]	1
Switch-point drift	[%]	± 2
Resolution	[mm]	< 3
Repeatability	[%]	0.5
Environment		
Ambient temperature	[°C]	-20...70
Protection		IP 67
Tests / approvals		
EMC		EN 61000-4-2 ESD: 4 kV CD / plastics EN 61000-4-3 HF radiated: 3 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-6 HF conducted: 3 V EN 55011: class A
MTTF	[Years]	158
Vibration resistance		(10-55) Hz 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz
Shock resistance		EN 60068-2-6 Fc
Shock resistance		EN 60068-2-27 Ea yes
Mechanical data		
Housing materials		316L stainless steel / 1.4404; polyamide; Epoxid-Glaskeramik
Weight	[kg]	0.1
Displays / operating elements		
Display		Switching status 2 LED yellow Echo LED 1 LED green
Electrical connection		
Connection		M12 connector
Wiring		
2 5 3 4		
Accessories		
Accessories (included)		2 fixing nuts, stainless steel; 2 Flat SS washers
Remarks		
Remarks		cULus - Class 2 source required
Pack quantity	[piece]	1