


**VTV122**

VIBRATION TRANSMITTER

Diagnostic systems

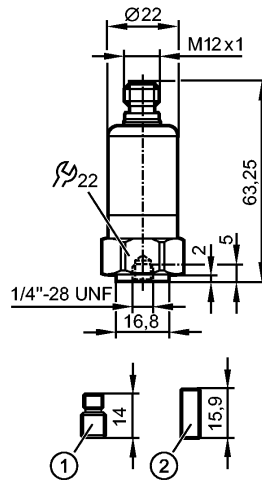

1: Threaded adapter 1/4"-28 UNF / M8 x 1.25 mm  
 2: Threaded adapter 1/4"-28 UNF  
 tightening torque 8 Nm



**Product characteristics**

Vibration transmitter
VTV
Connection via M12 connector
Vibration transmitter to ISO 10816
Measuring range RMS: 0...25 mm/s
Analog output 4...20 mA
2-wire connection technology

**Application**

Application	Vibration transmitter Vrms to ISO 10816
-------------	---

**Electrical data**

Operating voltage [V]	9.6...32 DC
Protection class	III

**Inputs / outputs**

Inputs / outputs total	1
------------------------	---

**Outputs**

analog	
current output [mA]	4...20
Max. load [Ω]	max. (Ub - 9.6 V) x 50; 720 at Ub = 24 V

**Measuring / setting range**

Measuring range [mm/s]	0...25 RMS
Frequency range [Hz]	10...1000

**Accuracy / deviations**

Accuracy [% of the final value]	< ± 3
Repeatability	< 0.5 %
Linearity	0.25 %

**Environment**

Ambient temperature [°C]	-30...125, for UL applications: max. 80 °C
Protection	IP 67 / IP 68 / IP 69K

**VTV122**

VIBRATION TRANSMITTER

**Diagnostic systems**

**Tests / approvals**

EMC	EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-5 Surge: 1 kV EN 61000-4-6 HF conducted: 10 V
Shock resistance	400 g
MTTF [Years]	881

**Mechanical data**


Type of sensor	Microelectromechanical system (MEMS)
Number of measurement axes	1
Housing materials	stainless steel 316L / 1.4404
Type of mounting	set screw
Weight [kg]	0.122

**Electrical connection**

Connection	M12 connector
------------	---------------

**Wiring**

- 1: L+
- 2: 4...20 mA



**Remarks**

Pack quantity [piece]	1
-----------------------	---