


**VTV12A**

VIBRATION TRANSMITTER

Diagnostic systems

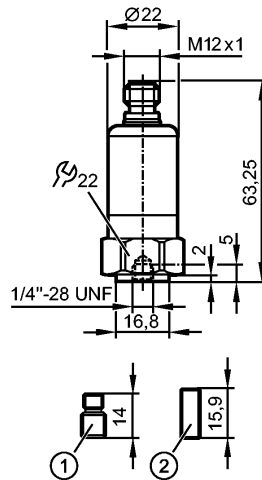

- 1: Threaded adapter 1/4"-28 UNF / M8 x 1.25 mm
  - 2: Threaded adapter 1/4"-28 UNF
- tightening torque 8 Nm



**Product characteristics**

Vibration transmitter
Connection via M12 connector
Vibration transmitter to ISO 10816
Measuring range RMS: 0...25 mm/s
Analog output 4...20 mA
2-wire connection technology
ATEX approval
Group II, category 3D/3G

**Application**

Application	Vibration transmitter Vrms to ISO 10816
-------------	---

**Electrical data**

Operating voltage [V]	9.6...32 DC
Protection class	III

**Inputs / outputs**

Inputs / outputs total	1
------------------------	---

**Outputs**

analog	
current output [mA]	4...20
Max. load [Ω]	max. (U <sub>b</sub> - 9.6 V) x 50; 720 at U <sub>b</sub> = 24 V

**Measuring / setting range**

Measuring range [mm/s]	0...25 RMS
Frequency range [Hz]	10...1000

**Accuracy / deviations**

Accuracy [% of the final value]	< ± 3
Repeatability	< 0.5 %
Linearity	0.25 %

**Environment**

Ambient temperature [°C]	-20...60
--------------------------	----------

# VTV12A

VIBRATION TRANSMITTER

**Diagnostic systems**

Protection	IP 67; when used outside hazardous areas: IP 69K
------------	--

### Tests / approvals

Marking of the unit	<p>II 3D Ex tc IIIC T110°C Dc X</p> <p>II 3G Ex nA IIC T4 Gc X</p>
---------------------	--

EMC	<p>EN 61000-4-2 ESD: 4 kV CD / 8 kV AD</p> <p>EN 61000-4-3 HF radiated: 10 V/m</p> <p>EN 61000-4-4 Burst: 2 kV</p> <p>EN 61000-4-6 HF conducted: 10 V</p>
-----	---

Shock resistance	400 g
------------------	-------

MTTF [Years]	864.81
--------------	--------

### Mechanical data

Type of sensor	Microelectromechanical system (MEMS)
----------------	--------------------------------------

Number of measurement axes	1
----------------------------	---

Housing materials	stainless steel 316L / 1.4404
-------------------	-------------------------------

Type of mounting	set screw
------------------	-----------


Weight [kg]	0.14
-------------	------

### Electrical connection

Connection	M12 connector
------------	---------------

#### Wiring

- 1: L+
- 2: 4...20 mA



### Accessories

Accessories (included)	Threaded adapter 1/4"-28 UNF / M8 x 1.25 mm; Threaded adapter 1/4"-28 UNF
------------------------	---

### Remarks

Pack quantity [piece]	1
-----------------------	---