


SB7242



Flow meter with fast response and display

SBG11KL0FRKG

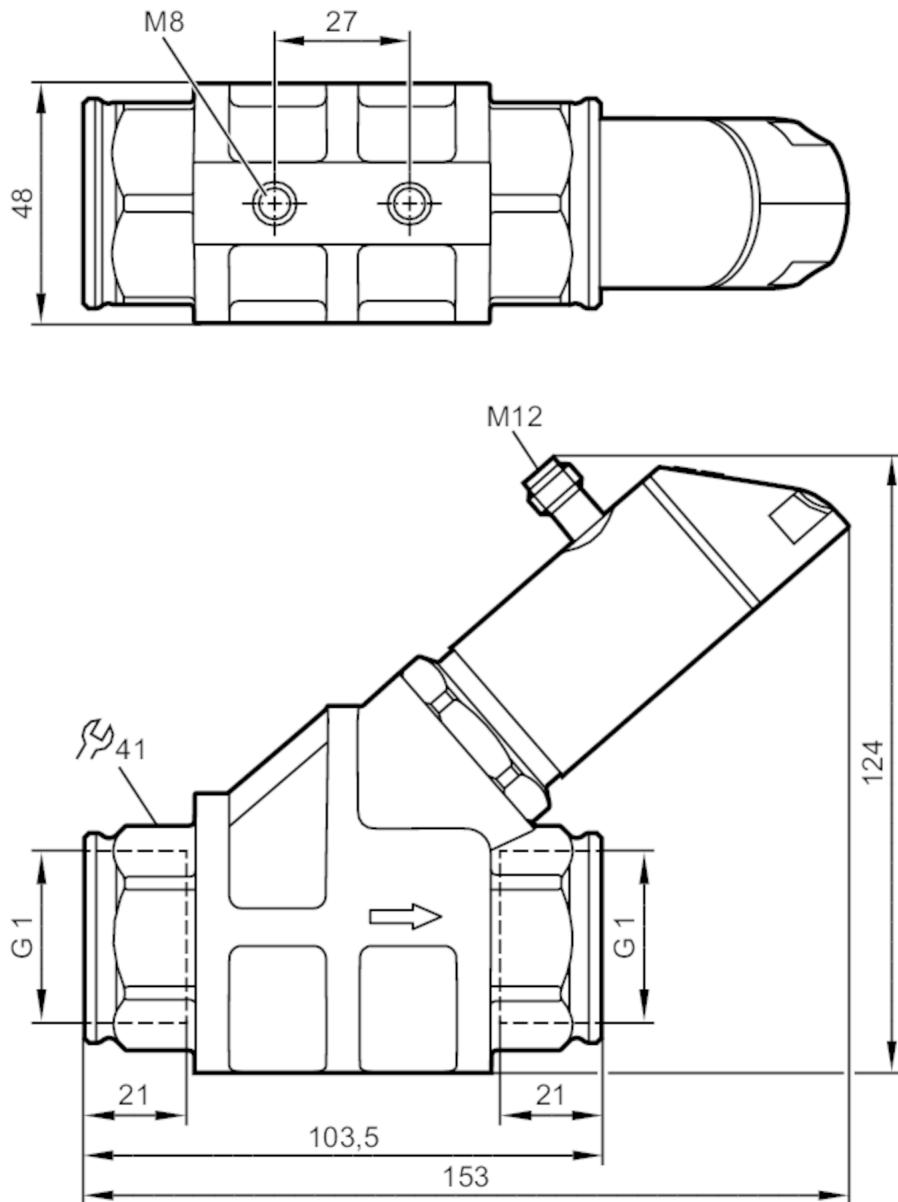

Product characteristics

Measuring range	0.6...15 l/min	0.036...0.9 m³/h	9.6...237.8 gph	0.16...3.965 gpm
Process connection	threaded connection G 1 Internal thread			

Application

System	gold-plated contacts
Media	Liquids; oils (viscosity 320 mm²/s at 40 °C)
Medium temperature [°C]	-10...100
Pressure rating [bar]	100
Pressure rating [Mpa]	10
Note on pressure rating	at medium temperature >70°C: 80 bar / 8 MPa

SB7242



Flow meter with fast response and display

SBG11KL0FRKG

Electrical data							
Operating voltage	[V]	18...30 DC; (to SELV/PELV; cULus - Class 2 source required)					
Current consumption	[mA]	< 50					
Protection class		III					
Reverse polarity protection		yes					
Power-on delay time	[s]	< 3					
Outputs							
Total number of outputs		2					
Output signal		switching signal; analog signal; frequency signal; IO-Link					
Max. voltage drop switching output DC	[V]	2					
Max. current load per output	[mA]	150; (200: ...60 °C; Ambient temperature; 250: ...40 °C; Ambient temperature)					
Analog current output	[mA]	4...20					
Max. load	[Ω]	500					
Short-circuit protection		yes					
Overload protection		yes					
Frequency of the output	[Hz]	0...10000					
Measuring/setting range							
Measuring range		0.6...15 l/min	0.036...0.9 m³/h	9.6...237.8 gph	0.16...3.965 gpm		
Display range		0...18 l/min	0...1.08 m³/h	0...285.4 gph	0...4.755 gpm		
Resolution		0.01 l/min	0.001 m³/h	0.1 gph	0.001 gpm		
Set point SP		0.1...15 l/min	0.006...0.9 m³/h	1.6...237.8 gph	0.025...3.965 gpm		
Reset point rP		0...14.9 l/min	0...0.894 m³/h	0...236.2 gph	0...3.935 gpm		
Frequency end point, FEP		1...15 l/min	0.06...0.9 m³/h	15.8...237.8 gph	0.265...3.965 gpm		
In steps of		0.01 l/min	0.001 m³/h	0.2 gph	0.005 gpm		
Frequency at the end point FRP	[Hz]		10...10000				
In steps of	[Hz]		10				
Measuring dynamics			1:50				
Temperature monitoring							
Measuring range		-10...100 °C	14...212 °F				
Display range		-32...122 °C	-25.6...251.6 °F				
Resolution		0.1 °C	0.1 °F				
Set point SP		-9.3...100 °C	15.2...212 °F				
Reset point rP		-10...99.3 °C	14...210.8 °F				
In steps of		0.1 °C	0.2 °F				
Frequency start point, FSP		-10...78 °C	14...172.4 °F				
Frequency end point, FEP		12...100 °C	53.6...212 °F				
Frequency at the end point FRP	[Hz]		10...10000				
Accuracy / deviations							
Flow monitoring							
Accuracy (in the measuring range)		± 5 % MEW; (Q > 1 l/min; 20...70 °C Medium temperature)					
Repeatability		± 1 % MEW					

SB7242



Flow meter with fast response and display

SBG11KL0FRKG

Temperature monitoring		
Temperature drift		0,029 °C / K
Accuracy	[K]	3 K (25°C; Q > 1 l/min)
Reaction times		
Flow monitoring		
Response time	[s]	0.01
Damping process value dAP	[s]	0...5
In steps of	[s]	0.1
Damping for the analog output dAA	[s]	0...5
In steps of	[s]	0.1
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 120 (Q > 1 l/min)
Software / programming		
Parameter setting options	hysteresis / window; normally open / closed; switching logic; current/frequency output; damping for the switching output / analog output; display can be rotated and switched off; standard unit of measurement; process value color; calibration factor	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis	
SIO mode	yes	
Required master port class	A	
Process data analog	2	
Process data binary	2	
Min. process cycle time	[ms]	3.2
Supported DeviceIDs	Type of operation default	DeviceID 1043
Operating conditions		
Ambient temperature	[°C]	0...60
Note on ambient temperature	medium temperature < 80 °C medium temperature < 100 °C: 0...40 °C	
Storage temperature	[°C]	-15...80
Protection	IP 65; IP 67	
Tests / approvals		
EMC	DIN EN 61000-6-2 DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
UL approval	UL approval number File number UL	I006 E174189
Pressure equipment directive	sound engineering practice	

SB7242



Flow meter with fast response and display

SBG11KL0FRKG


Mechanical data		
Weight	[g]	1608.6
Material		stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC; brass chemically nickel-plated
Materials (wetted parts)		stainless steel (1.4401 / 316); stainless steel (1.4404 / 316L); brass (2.0371); brass chemically nickel-plated; PPS; O-ring: FKM
Process connection		threaded connection G 1 Internal thread
Switching cycles mechanical		10 million
Displays / operating elements		
Display	Display unit	6 x LED, green
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, red/green alternating indication 4-digit
	Programming	alphanumeric display, 4-digit
Remarks		
Remarks	Use of 200 micron filtration is recommended.	
	All data refer to oil with the following nominal viscosity:	
	320 mm²/s, 40 °C	
	MW = Measured value	
Pack quantity		
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		



Flow meter with fast response and display

SBG11KL0FRKG

Connection

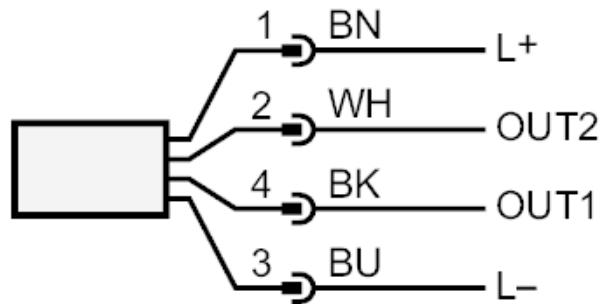

OUT1:

- Switching output Volumetric flow quantity monitoring
- Switching output Temperature monitoring
- Frequency output Volumetric flow quantity monitoring
- Frequency output Temperature monitoring
- IO-Link

OUT2:

- Switching output Volumetric flow quantity monitoring
- Switching output Temperature monitoring
- analog output Volumetric flow quantity monitoring
- analog output Temperature monitoring
- Colors to DIN EN 60947-5-2
- Core colors :

BK = black

BN = brown

BU = blue

WH = white